Expandet Socket Anchor with internal thread

Expandet Socket Anchor with internal thread for fixing with Expandet Injection Mortar ESI+ and EVL+.

ADVANTAGES

- Flush with the wall.
- Useable with all metric screws.
- Useable together with sleeve.

Type	Load capacities
DIMENSION	N_{Rd} Design resistance, tension kN♦
M6	3,50
M8	5,00
M10	8,00
M12	8,00

♦ Design resistance for tension is maximum in concrete C20/25 together with threaded rod/bolt in 5.8 stee, not influenced by edge distance and/or spacing.

INSTALLATION:

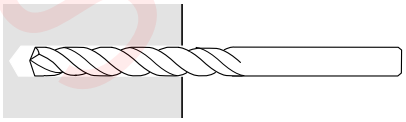

1] Drill a hole with correct diameter and depth

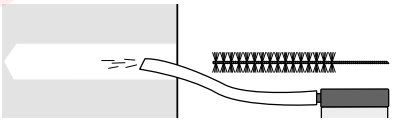

2] Clean the drilled hole thoroughly

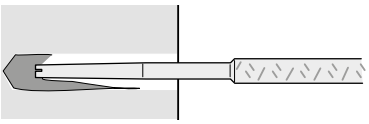

3] Inject the mortar

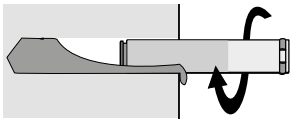

4] Insert the Socket Anchor in a slowly turning motion until flush with the wall

5] The installation is finished

EXPANDET SOCKET ANCHOR WITH INTERNAL THREAD, 5.8 steel, zinc plated

TYPE DIMENSION MM	DRILL DIA. IN BRICK AND CONCRETE WALL, MM	DRILL DIA. WITH SLEEVE MM	OUTSIDE DIAMETER OF ANCHOR MM	EXPANDET ARTICLE NO.	PCS. PER BOX	Part No	EAN 13 PER BOX
6 x 48	10	12	8	980106	10	N1L4306048	5708620100562
8 x 80	14	16	12	980108	10	N1L4308080	5708620100531
10 x 80	16	20	14	980110	10	N1L4310080	5708620100548
12 x 80	18	20	16	980112	10	N1L4312080	5708620100555

(Given dimensions are the internal diameter x total length)