



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrappe Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com





sales@jcfasteners.com

DIN 7985 Pan Phillips (H)



Catalogue Datasheet **B4B04**

Stainless Steel A2/1.4301 (SS304)

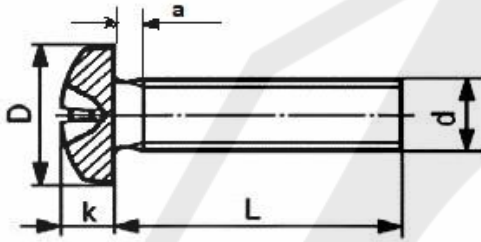

a = Thread runout as per ISO 3508

Parameter↓ Size→	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	*(M3.5x0.6)	
Head Dia D	Max	3.20	4.00	5.00	6.00	6.00
	Min	2.90	3.70	4.70	5.70	5.50
Head Height k	Max	1.42	1.72	2.12	2.52	2.52
	Min	1.18	1.48	1.88	2.28	2.15
Recess dia m nom	1.80	2.50	2.70	3.10	3.90	
Drive Bit	PH0	PH1	PH1	PH1	PH2	
Length Tolerance	≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50					

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length↓ Size→	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	*(M3.5x0.6)
2	B4B0410602				
3	B4B0410603	B4B0402003	B4B0420503	B4B0403003	
4	B4B0410604	B4B0402004	B4B0420504	B4B0403004	B4B0430504
5	B4B0410605	B4B0402005	B4B0420505	B4B0403005	B4B0430505
6	B4B0410606	B4B0402006	B4B0420506	B4B0403006	B4B0430506
8	B4B0410608	B4B0402008	B4B0420508	B4B0403008	B4B0430508
10	B4B0410610	B4B0402010	B4B0420510	B4B0403010	B4B0430510
12	B4B0410612	B4B0402012	B4B0420512	B4B0403012	B4B0430512
14	B4B0410614	B4B0402014	B4B0420514	B4B0403014	B4B0430514
16	B4B0410616	B4B0402016	B4B0420516	B4B0403016	B4B0430516
18	B4B0410618	B4B0402018	B4B0420518	B4B0403018	B4B0430518
20	B4B0410620	B4B0402020	B4B0420520	B4B0403020	B4B0430520
22	B4B0410622	B4B0402022	B4B0420522	B4B0403022	B4B0430522
25	B4B0410625	B4B0402025	B4B0420525	B4B0403025	B4B0430525
28		B4B0402028	B4B0420528	B4B0403028	B4B0430528
30		B4B0402030	B4B0420530	B4B0403030	B4B0430530
35		B4B0402035	B4B0420535	B4B0403035	B4B0430535
40		B4B0402040	B4B0420540	B4B0403040	B4B0430540
45		B4B0402045	B4B0420545	B4B0403045	B4B0430545
50		B4B0402050	B4B0420550	B4B0403050	B4B0430550
55				B4B0403055	B4B0430555
60				B4B0403060	B4B0430560
65				B4B0403065	B4B0430565
70				B4B0403070	B4B0430570
75				B4B0403075	B4B0430575
80				B4B0403080	B4B0430580
90				B4B0403090	B4B0430590
100				B4B0403100	

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

(* Not part of the standard)

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870 www.jcfasteners.com sales@jcfasteners.com

DIN 7985 Pan Phillips (H)



Catalogue Datasheet **B4B04**

Stainless Steel A2/1.4301 (SS304)

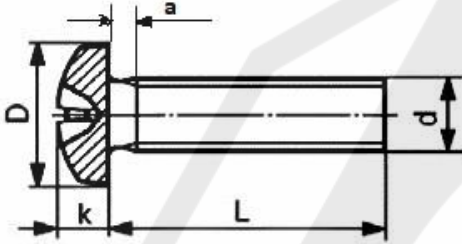

a = Thread runout as per ISO 3508

Parameter↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5	
Head Dia D	Max	8.00	10.00	12.00	16.00	20.00
	Min	7.64	9.64	11.57	15.57	19.48
Head Height k	Max	3.25	3.95	4.75	6.15	7.68
	Min	2.95	3.65	4.45	5.85	7.14
Recess dia m nom	4.60	5.30	6.80	9.00	10.10	
Drive Bit	PH2	PH2	PH3	PH4	PH4	
Length Tolerance	≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50					

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
4	B4B0404004				
5	B4B0404005				
6	B4B0404006	B4B0405006			
8	B4B0404008	B4B0405008	B4B0406008		
10	B4B0404010	B4B0405010	B4B0406010	B4B0408010	
12	B4B0404012	B4B0405012	B4B0406012	B4B0408012	
14	B4B0404014	B4B0405014	B4B0406014	B4B0408014	
16	B4B0404016	B4B0405016	B4B0406016	B4B0408016	B4B0410016
18	B4B0404018	B4B0405018	B4B0406018	B4B0408018	B4B0410018
20	B4B0404020	B4B0405020	B4B0406020	B4B0408020	B4B0410020
22	B4B0404022	B4B0405022	B4B0406022	B4B0408022	B4B0410022
25	B4B0404025	B4B0405025	B4B0406025	B4B0408025	B4B0410025
28	B4B0404028	B4B0405028	B4B0406028	B4B0408028	B4B0410028
30	B4B0404030	B4B0405030	B4B0406030	B4B0408030	B4B0410030
35	B4B0404035	B4B0405035	B4B0406035	B4B0408035	B4B0410035
40	B4B0404040	B4B0405040	B4B0406040	B4B0408040	B4B0410040
45	B4B0404045	B4B0405045	B4B0406045	B4B0408045	B4B0410045
50	B4B0404050	B4B0405050	B4B0406050	B4B0408050	B4B0410050
55	B4B0404055	B4B0405055	B4B0406055	B4B0408055	B4B0410055
60	B4B0404060	B4B0405060	B4B0406060	B4B0408060	B4B0410060
65	B4B0404065	B4B0405065	B4B0406065	B4B0408065	B4B0410065
70	B4B0404070	B4B0405070	B4B0406070	B4B0408070	B4B0410070
75	B4B0404075	B4B0405075	B4B0406075	B4B0408075	B4B0410075
80	B4B0404080	B4B0405080	B4B0406080	B4B0408080	B4B0410080
90	B4B0404090	B4B0405090	B4B0406090	B4B0408090	B4B0410090
100	B4B0404100	B4B0405100	B4B0406100	B4B0408100	B4B0410100

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F