



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrappa Road, Bengaluru - 560002



41478141, 9880539870 www.jcfasteners.com sales@jcfasteners.com

DIN 965 CSK PHILLIPS (H)



Catalogue Datasheet B4B05

Stainless Steel A2/1.4301 (SS304)

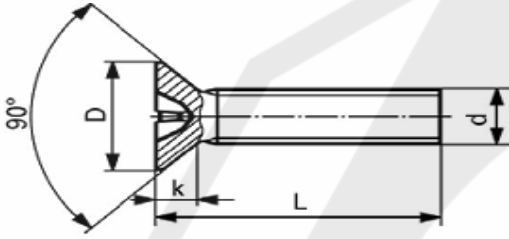

Dimensions in mm

Parameter ↓ Size →	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M3.5x0.6	
Head Dia D	Max	3.00	3.80	4.70	5.60	6.50
	Min	2.75	3.50	4.40	5.30	6.10
Head Height k	Max	1.05	1.25	1.55	1.75	2.05
Recess dia m nom		1.70	2.35	2.70	2.90	3.90
Slot depth max		0.91	1.25	1.55	1.80	1.90
Drive Bit		PH0	PH1	PH1	PH1	PH2
Length Tolerance		≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50				

Quote the item code given below with your order/ inquiries:

Thread runout as per ISO 3508

Length ↓ Size →	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M3.5x0.6
2	B4B0510602				
3	B4B0510603	B4B0502003	B4B0520503	B4B0503003	
4	B4B0510604	B4B0502004	B4B0520504	B4B0503004	B4B0530504
5	B4B0510605	B4B0502005	B4B0520505	B4B0503005	B4B0530505
6	B4B0510606	B4B0502006	B4B0520506	B4B0503006	B4B0530506
8	B4B0510608	B4B0502008	B4B0520508	B4B0503008	B4B0530508
10	B4B0510610	B4B0502010	B4B0520510	B4B0503010	B4B0530510
12	B4B0510612	B4B0502012	B4B0520512	B4B0503012	B4B0530512
14	B4B0510614	B4B0502014	B4B0520514	B4B0503014	B4B0530514
16	B4B0510616	B4B0502016	B4B0520516	B4B0503016	B4B0530516
18	B4B0510618	B4B0502018	B4B0520518	B4B0503018	B4B0530518
20	B4B0510620	B4B0502020	B4B0520520	B4B0503020	B4B0530520
22	B4B0510622	B4B0502022	B4B0520522	B4B0503022	B4B0530522
25	B4B0510625	B4B0502025	B4B0520525	B4B0503025	B4B0530525
28		B4B0502028	B4B0520528	B4B0503028	B4B0530528
30		B4B0502030	B4B0520530	B4B0503030	B4B0530530
35		B4B0502035	B4B0520535	B4B0503035	B4B0530535
40		B4B0502040	B4B0520540	B4B0503040	B4B0530540
45		B4B0502045	B4B0520545	B4B0503045	B4B0530545
50		B4B0502050	B4B0520550	B4B0503050	B4B0530550
55				B4B0503055	B4B0530555
60				B4B0503060	B4B0530560
65				B4B0503065	B4B0530565
70				B4B0503070	B4B0530570
75				B4B0503075	B4B0530575
80				B4B0503080	B4B0530580
90				B4B0503090	B4B0530590
100				B4B0503100	

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com





sales@jcfasteners.com

DIN 965 CSK PHILLIPS (H)



Catalogue Datasheet B4B05

Stainless Steel A2/1.4301 (SS304)

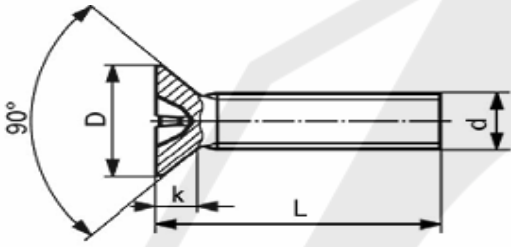

Dimensions in mm

Parameter↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5	
Head Dia D	Max	7.50	9.20	11.00	14.50	18.00
	Min	7.14	8.84	10.57	14.07	17.57
Head Height k	Max	2.30	2.65	3.15	4.20	5.20
Recess dia m nom		4.40	4.60	6.60	8.70	9.60
Slot depth max		2.40	2.60	3.30	4.40	5.30
Drive Bit	PH2	PH2	PH3	PH4	PH4	
Length Tolerance	≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50					

Quote the item code given below with your order/ inquiries:

Thread runout as per ISO 3508

Length↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
5	B4B0504005				
6	B4B0504006	B4B0505006			
8	B4B0504008	B4B0505008	B4B0506008		
10	B4B0504010	B4B0505010	B4B0506010	B4B0508010	
12	B4B0504012	B4B0505012	B4B0506012	B4B0508012	
14	B4B0504014	B4B0505014	B4B0506014	B4B0508014	
16	B4B0504016	B4B0505016	B4B0506016	B4B0508016	B4B0510016
18	B4B0504018	B4B0505018	B4B0506018	B4B0508018	B4B0510018
20	B4B0504020	B4B0505020	B4B0506020	B4B0508020	B4B0510020
22	B4B0504022	B4B0505022	B4B0506022	B4B0508022	B4B0510022
25	B4B0504025	B4B0505025	B4B0506025	B4B0508025	B4B0510025
28	B4B0504028	B4B0505028	B4B0506028	B4B0508028	B4B0510028
30	B4B0504030	B4B0505030	B4B0506030	B4B0508030	B4B0510030
35	B4B0504035	B4B0505035	B4B0506035	B4B0508035	B4B0510035
40	B4B0504040	B4B0505040	B4B0506040	B4B0508040	B4B0510040
45	B4B0504045	B4B0505045	B4B0506045	B4B0508045	B4B0510045
50	B4B0504050	B4B0505050	B4B0506050	B4B0508050	B4B0510050
55	B4B0504055	B4B0505055	B4B0506055	B4B0508055	B4B0510055
60	B4B0504060	B4B0505060	B4B0506060	B4B0508060	B4B0510060
65	B4B0504065	B4B0505065	B4B0506065	B4B0508065	B4B0510065
70	B4B0504070	B4B0505070	B4B0506070	B4B0508070	B4B0510070
75	B4B0504075	B4B0505075	B4B0506075	B4B0508075	B4B0510075
80	B4B0504080	B4B0505080	B4B0506080	B4B0508080	B4B0510080
90	B4B0504090	B4B0505090	B4B0506090	B4B0508090	B4B0510090
100	B4B0504100	B4B0505100	B4B0506100	B4B0508100	B4B0510100

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F