




SEMS SCREWS (SCREW WASHER ASSEMBLY)

Hex (+) Screw with assembled Plain Washer & Spring Washer

BLACK OXIDE

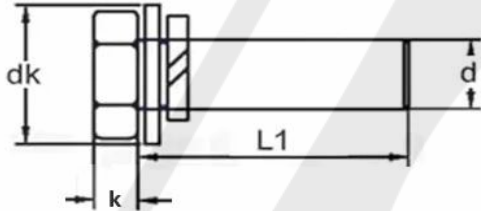

Catalogue Datasheet **B4B17**

Stainless Steel A2/1.4301 (SS304)

Size→ Parameter↓		M3x0.5	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
Washer dia dk	max	7.00	9.00	10.00	12.00	16.00	17.00
	min	6.60	8.60	9.60	11.50	15.50	16.50
Head Height k	max	2.30	3.10	3.80	4.30	5.60	6.60
	min	1.70	2.50	3.20	3.70	5.00	6.15
Across Flats s	max	5.50	7.00	8.00	10.00	13.00	17.00
	min	5.27	6.73	7.73	9.73	12.68	16.68

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Size→ Length↓	M3x0.5	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
5	U4B1703005o					
6	U4B1703006o	U4B1704006o				
8	U4B1703008o	U4B1704008o	U4B1705008o			
10	U4B1703010o	U4B1704010o	U4B1705010o	U4B1706010o		
12	U4B1703012o	U4B1704012o	U4B1705012o	U4B1706012o	U4B1708012o	
14	U4B1703014o	U4B1704014o	U4B1705014o	U4B1706014o	U4B1708014o	
16	U4B1703016o	U4B1704016o	U4B1705016o	U4B1706016o	U4B1708016o	U4B1710016o
18	U4B1703018o	U4B1704018o	U4B1705018o	U4B1706018o	U4B1708018o	U4B1710018o
20	U4B1703020o	U4B1704020o	U4B1705020o	U4B1706020o	U4B1708020o	U4B1710020o
25	U4B1703025o	U4B1704025o	U4B1705025o	U4B1706025o	U4B1708025o	U4B1710025o
30	U4B1703030o	U4B1704030o	U4B1705030o	U4B1706030o	U4B1708030o	U4B1710030o
35		U4B1704035o	U4B1705035o	U4B1706035o	U4B1708035o	U4B1710035o
40		U4B1704040o	U4B1705040o	U4B1706040o	U4B1708040o	U4B1710040o
45		U4B1704045o	U4B1705045o	U4B1706045o	U4B1708045o	U4B1710045o
50		U4B1704050o	U4B1705050o	U4B1706050o	U4B1708050o	U4B1710050o

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F