



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com



sales@jcfasteners.com


GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

CONCEALED STANDOFF CSS UNIFIED Series



Catalogue Datasheet **B4uC17**

Stainless Steel A2 (SS304)

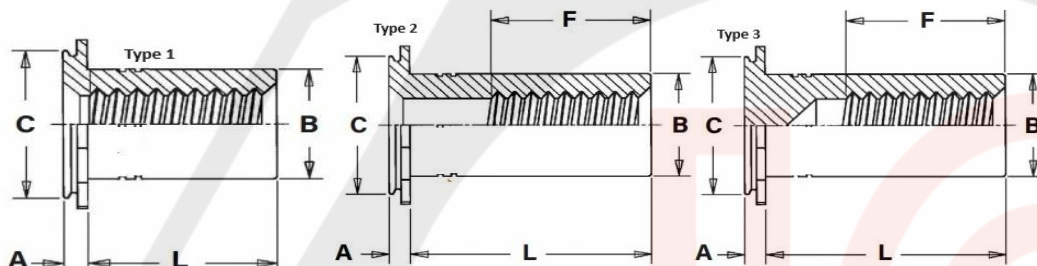

Size	#4-40	#6-32	#8-32	#10-32	1/4-20
A (Shank) Max	0.042	0.042	0.042	0.042	0.042
B (body dia) Max	0.165	0.213	0.245	0.290	0.354
C Head dia	0.212	0.289	0.311	0.343	0.389
Blind mounting hole Dia +0.03	0.213	0.290	0.312	0.344	0.390
Depth of Blind Hole Min	0.043	0.043	0.043	0.043	0.043
Min sheet thickness	0.062	0.062	0.062	0.062	0.062
Min Hole C/L to edge	0.188	0.219	0.250	0.281	0.375
Max tightening torque for mating screw (in. lbs.)	4.75	8.75	18.00	32.00	64.00
Installation (lbs.)	5052-H34 AL	2800	3000	4000	5500
	Cold Rolled Sheet	4000	4500	4800	5500
Pullout (lbs.)	5052-H34 AL	200	240	270	290
	Cold Rolled Sheet	300	350	400	450

Quote the item code given below with your order/ inquiries:

Dimensions in inches

Type	Length L	Length Code	#4-40	#6-32	#8-32	#10-32	1/4-20
Type #1	3/16 (5mm)	3	B4uC1744005	B4uC1763205	B4uC1783205	B4vC1713205	B4uC1762005
Type #2	1/4 (6mm)	4	B4uC1744006	B4uC1763206	B4uC1783206	B4vC1713206	B4uC1762006
	5/16 (8mm)	5	B4uC1744008	B4uC1763208	B4uC1783208	B4vC1713208	B4uC1762008
	3/8 (10mm)	6	B4uC1744010	B4uC1763210	B4uC1783210	B4vC1713210	B4uC1762010
Type #3	1/2 (12mm)	8	B4uC1744012	B4uC1763212	B4uC1783212	B4vC1713212	B4uC1762012
	5/8 (16mm)	10	B4uC1744016	B4uC1763216	B4uC1783216	B4vC1713216	B4uC1762016
	3/4 (20mm)	12	B4uC1744020	B4uC1763220	B4uC1783220	B4vC1713220	B4uC1762020
	1 (25mm)	16	B4uC1744025	B4uC1763225	B4uC1783225	B4vC1713225	B4uC1762025

Type #1: Minimum thread length is equal to barrel length "L". Screw might not pass through shank end. Screws with lengths exceeding "L" should not be used or they may cause "jacking-out" of standoff from the sheet.

Type #2: Screw might not pass through unthreaded end. Screws with lengths exceeding "L" should not be used or they may cause "jacking-out" of standoff from the sheet.

Type #3: Blind.

Sizes in BLUE are non-preferred. Availability is limited and MOQ higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F