



J.C. GUPTA & SONS

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrappe Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com



sales@jcfasteners.com

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

H-LOCK BLIND RIVET DOME HEAD WITH GROOVED MANDREL




Catalogue Datasheet **A2D57G**

Rivet Body

Steel zinc plated

Mandrel

Steel zinc plated

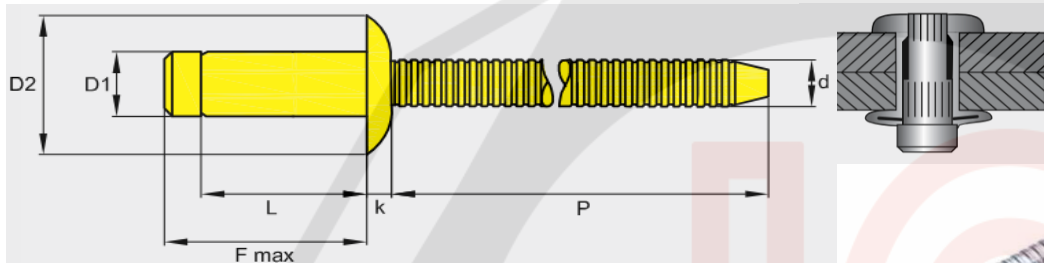

Rivet Size	Hole Size	Tensile	Push out	D1	Rivet Length L	D2	k	d	P
$\emptyset$				Rivet Dia	Tolerance	Head Dia	Head Thickness	Stem Dia	Stem Length
6.40	6.6 - 6.9 mm	7100N	1112N	6.4 +/- 0.15	+ 0.99 / - 0	13.0 +0.4/-0.20	3.0 +0.4/-0	4.00	≥ 30.0

Please quote below part numbers with your enquiries

Dimensions in mm

	Part No	F-Max				Part No	F-Max		
6.4 x 9.0	A2D5760409G	13.7 mm	1.5-3.5 mm	8900N	6.4 x 15.0	A2D5760415G	20.0 mm	7.5-9.5 mm	12700N
6.4 x 10.0	A2D5760410G	15.0 mm	2.8-4.8 mm	10200N	6.4 x 16.0	A2D5760416G	21.0 mm	8.8-10.8 mm	13600N
6.4 x 11.0	A2D5760411G	15.6 mm	3.4-5.4 mm	10600N	6.4 x 17.0	A2D5760417G	22.0 mm	9.8-11.8 mm	13600N
6.4 x 12.0	A2D5760412G	17.0 mm	4.8-6.8 mm	10600N	6.4 x 18.0	A2D5760418G	23.0 mm	10.8-12.8 mm	13600N
6.4 x 14.0	A2D5760414G	19.0 mm	6.8-8.8 mm	12700N	6.4 x 19.0	A2D5760419G	24.0 mm	11.8-13.8 mm	13600N

Sizes in blue are limited availability. MOQ may be higher.

Data is strictly informative.

Characteristics

- suitable for high loads
- expands under the closing head to give more grip
- the mandrel head is held captive within rivet body (mechanical mandrel locking)
- the riveting is splash proof
- high shearing and tensile forces
- extremely suitable for thin sheet material

