



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrappa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com



sales@jcfasteners.com



GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

ASME B 18.6.3 PAN PHILLIPS



Catalogue Datasheet **B4uB04p**

Stainless Steel A2/1.4301 (SS304)

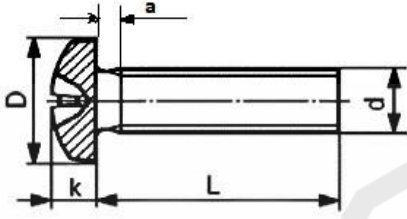

Dimensions in inches

Size→	#2-56	#4-40	#6-32	#8-32	#10-24	#12-24	1/4"-20
Screw dia d	0.086	0.112	0.138	0.164	0.19	0.216	0.25
Head Dia D	max	0.167	0.219	0.27	0.322	0.373	0.425
	min	0.155	0.205	0.256	0.306	0.357	0.407
Head height k	max	0.062	0.08	0.097	0.115	0.133	0.151
	min	0.053	0.07	0.087	0.105	0.122	0.139
Recess dia m nom	0.097	0.115	0.159	0.175	0.192	0.252	0.274
driver size	1	1	2	2	2	3	3
Length Tolerance	≤ 1/2" ±0.03" >1/2" - ≤1" ±0.04" >1" - ≤1-1/2" ±0.06" >1-1/2" - ≤2" ±0.08" >2" - ≤3" ±.10"						

Quote the item code given below with your order/ inquiries:

a = Thread runout as per ISO 3508

Length↓ Size→	#2-56	#4-40	#6-32	#8-32	#10-24	#12-24	1/4"-20
3/16"	B4uB04p25648	B4uB04p44048	B4uB04p63248				
1/4"	B4uB04p25662	B4uB04p44062	B4uB04p63262	B4uB04p83262			
5/16"	B4uB04p25679	B4uB04p44079	B4uB04p63279	B4uB04p83279	B4uB04p12479	B4uB04p22479	
3/8"	B4uB04p25691	B4uB04p44091	B4uB04p63291	B4uB04p83291	B4uB04p12491	B4uB04p22491	B4uB04p62091
7/16"	B4uB04p25611	B4uB04p44011	B4uB04p63211	B4uB04p83211	B4uB04p12411	B4uB04p22411	B4uB04p62011
1/2"	B4uB04p25613	B4uB04p44013	B4uB04p63213	B4uB04p83213	B4uB04p12413	B4uB04p22413	B4uB04p62013
5/8"	B4uB04p25615	B4uB04p44015	B4uB04p63215	B4uB04p83215	B4uB04p12415	B4uB04p22415	B4uB04p62015
3/4"	B4uB04p25619	B4uB04p44019	B4uB04p63219	B4uB04p83219	B4uB04p12419	B4uB04p22419	B4uB04p62019
7/8"	B4uB04p25623	B4uB04p44023	B4uB04p63223	B4uB04p83223	B4uB04p12423	B4uB04p22423	B4uB04p62023
1"	B4uB04p25625	B4uB04p44025	B4uB04p63225	B4uB04p83225	B4uB04p12425	B4uB04p22425	B4uB04p62025
1 1/8"		B4uB04p44028	B4uB04p63228	B4uB04p83228	B4uB04p12428	B4uB04p22428	B4uB04p62028
1 1/4"		B4uB04p44031	B4uB04p63231	B4uB04p83231	B4uB04p12431	B4uB04p22431	B4uB04p62031
1 1/2"		B4uB04p44038	B4uB04p63238	B4uB04p83238	B4uB04p12438	B4uB04p22438	B4uB04p62038
1 5/8"		B4uB04p44041	B4uB04p63241	B4uB04p83241	B4uB04p12441	B4uB04p22441	B4uB04p62041
1 3/4"		B4uB04p44044	B4uB04p63244	B4uB04p83244	B4uB04p12444	B4uB04p22444	B4uB04p62044
2"		B4uB04p44051	B4uB04p63251	B4uB04p83251	B4uB04p12451	B4uB04p22451	B4uB04p62051
2-1/2"			B4uB04p63263	B4uB04p83263	B4uB04p12463	B4uB04p22463	B4uB04p62063

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F