



J.C. GUPTA & SONS

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002


41478141, 9880539870 www.jcfasteners.com sales@jcfasteners.com

ASME B 18.6.4 PAN POZI Thread Forming Screws for Metal



Catalogue Datasheet **A2uB12**

ST-ZINC

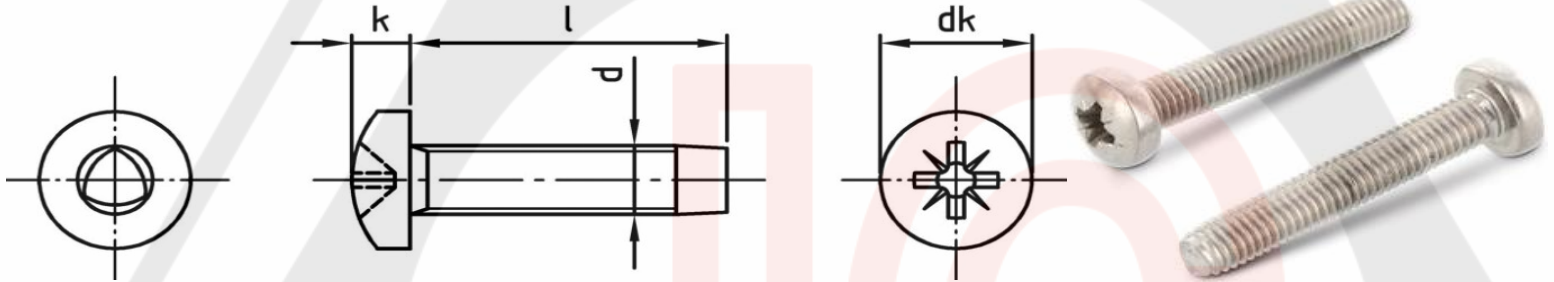

Size→		#2-56	#4-40	#6-32	#8-32	#10-24	#10-32 UNF	1/4"-20
Screw dia d	max	0.0875	0.1145	0.141	0.167	0.194	0.194	0.255
Head Dia dk	max	0.167	0.219	0.270	0.322	0.373	0.373	0.492
	min	0.155	0.205	0.256	0.306	0.357	0.357	0.473
Head height k	max	0.062	0.080	0.097	0.115	0.133	0.133	0.175
	min	0.053	0.070	0.087	0.105	0.122	0.122	0.162
Driver Size		1	1	2	2	2	2	3
Suggested pilot hole size	AL	0.076 - 0.079	0.098 - 0.102	0.120 - 0.125	0.147 - 0.152	0.166 - 0.170	0.173 - 0.177	0.219 - 0.228
	S	0.076 - 0.079	0.098 - 0.104	0.120 - 0.128	0.147 - 0.154	0.166 - 0.177	0.173 - 0.180	0.219 - 0.234
Length Tolerance		≤ 3/4" +0/-0.031" >3/4" - ≤1-1/2" +0/-0.046" >1-1/2" +0/-0.062						

Quote the item code given below with your order/ inquiries:

Dimensions in inches

Length↓ Size→	#2-56	#4-40	#6-32	#8-32	#10-24	#10-32 UNF	1/4"-20
3/16"	A2uB1225648	A2uB1244048	A2uB1263248				
1/4"	A2uB1225662	A2uB1244062	A2uB1263262		A2uB1212462		
5/16"			A2uB1263279				
3/8"	A2uB1225691	A2uB1244091	A2uB1263291	A2uB1283291	A2uB1212491	A2vB1213291	
7/16"			A2uB1263211				
1/2"		A2uB1244013	A2uB1263213	A2uB1283213	A2uB1212413		A2uB1262013
5/8"		A2uB1244015	A2uB1263215	A2uB1283215	A2uB1212415		A2uB1262015
3/4"			A2uB1263219		A2uB1212419		A2uB1262019
1"							A2uB1262025
1 1/4"					A2uB1212431		
1 1/2"							A2uB1262038

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative