



J.C. GUPTA & SONS

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrappe Road, Bengaluru - 560002




41478141, 9880539870 www.jcfasteners.com sales@jcfasteners.com

BLIND RIVET NUT Large Flange LF HEXAGONAL SHANK OPEN TYPE



Catalogue Datasheet **B4C64**

Stainless Steel A2/1.4301 (SS304)

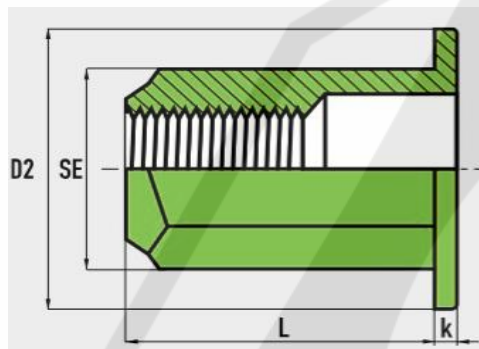


Dimensions in mm


Thread Size	Part No	Grip Range	SW1	D2	SE	L	SW	k	Pull-In	Maximum Torque
Dia			Hole Size Hex	Collar Dia	Across Corners	Body Length	Across Flat	Collar Thickness		
M4x0.7 1GR	B4C6404001	0.5-3.0 mm	6.1 mm	9.2	6.8	11.1	6.0	1.0	6800 N	3.0 Nm
M5x0.8 1GR	B4C6405001	0.5-3.0 mm	7.1 mm	10.2	7.9	13.1	7.0	1.0	10000 N	6.0 Nm
M5x0.8 2GR	B4C6405002	3.0-5.5 mm				15.0				
M6x1.0 1GR	B4C6406001	0.5-3.0 mm	9.1 mm	12.6	10.2	15.1	9.0	1.5	15000 N	10.0 Nm
M6x1.0 2GR	B4C6406002	3.0-5.5 mm				17.0				
M8x1.25 1GR	B4C6408001	0.5-3.0 mm	11.1 mm	15.8	12.4	17.0	11.0	1.5	27000 N	24.0 Nm
M8x1.25 2GR	B4C6408002	3.0-5.5 mm				19.0				
M10x1.5 1GR	B4C6410001	1.0-4.0 mm	13.1 mm	18.2	14.7	21.0	13.0	2.0	37000 N	48.0 Nm
M10x1.5 2GR	B4C6410002	4.0-6.0 mm				23.0				
M12x1.75 1GR	B4C6412001	1.0-4.0 mm	16.1 mm	19.3	18.1	25.5	16.0	2.0	54000 N	82.0 Nm

Sizes in blue have limited availability.MOQ may be higher.


Data is purely informative




Spin on



Insert



Upset



Spin off

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F