



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com



sales@jcfasteners.com

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

BLIND RIVETS DOMED HEAD (~ DIN EN ISO 15983)

Rivet Body



MONEL * zinc plated

Mandrel

Steel Zinc Plated



Catalogue Datasheet **R5D31G**

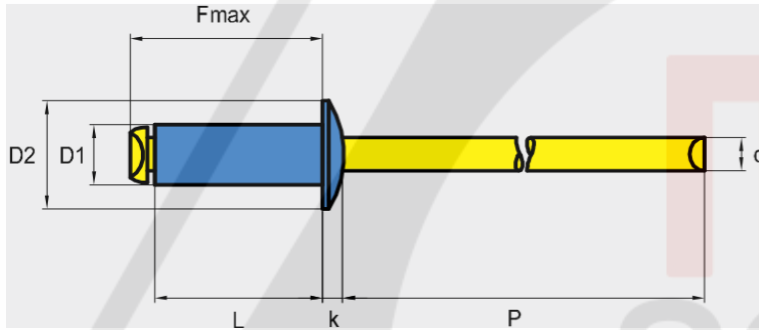

Dimensions in mm

Rivet Size	Hole Size	k	D1	P	D2	d	Shear	Tensile
$\emptyset$		Head Thickness	Rivet Dia	Stem Length	Head Dia	Stem Dia		
3.2	3.3 mm	1.0 +/- 0.2	3.2 +0.08/-0.15	≥ 27.0	6.3 +/- 0.3	1.90	1500 N	1900 N
4.0	4.1 mm	1.2 +/- 0.3	4.0 +0.08/-0.15		7.9 +/- 0.3	2.30	2200 N	3000 N
4.8	4.9 mm	1.2 +/- 0.3	4.8 +0.08/-0.15		8.1 +/- 0.3	2.90	3300 N	3750 N
6.4	6.5 mm	1.6 +/- 0.3	6.4 +0.08/-0.15	≥ 31.0	10.8 +/- 0.3	3.90	5400 N	6750 N

Length Tolerance +1.0/-0.2

	F-Max		Part No
3.2 x 5.0	10.00	0.5 - 1.8 mm	R5D3132005G
3.2 x 6.0	11.00	1.8 - 3.1 mm	R5D3132006G
3.2 x 7.5	12.50	3.1 - 4.3 mm	R5D3132008G
3.2 x 9.0	14.00	4.3 - 5.8 mm	R5D3132009G
3.2 x 10.0	15.00	5.8 - 7.1 mm	R5D3132010G
3.2 x 12.0	17.00	7.1 - 9.0 mm	R5D3132012G
4.0 x 6.2	11.20	1.3 - 2.5 mm	R5D3104602G
4.0 x 7.8	12.80	2.5 - 4.1 mm	R5D3104708G
4.0 x 9.5	14.50	4.1 - 5.8 mm	R5D3104905G
4.0 x 10.3	15.30	5.8 - 6.6 mm	R5D3104103G
4.0 x 11.5	16.50	6.6 - 7.9 mm	R5D3104115G

	F-Max		Part No
4.8 x 6.0	11.50	0.5 - 2.3 mm	R5D3148006G
4.8 x 7.5	13.00	2.3 - 3.8 mm	R5D3148705G
4.8 x 9.0	14.50	3.8 - 5.1 mm	R5D3148009G
4.8 x 10.0	15.50	5.1 - 5.8 mm	R5D3148010G
4.8 x 12.5	18.00	5.8 - 8.6 mm	R5D3148125G
4.8 x 16.5	22.00	8.6 - 12.5 mm	R5D3148165G
4.8 x 19.0	24.50	12.5 - 15.0 mm	R5D3148019G
4.8 x 21.5*	27.00	15.0 - 17.5 mm	R5D3148019G
6.4 x 12.5	19.00	4.0 - 7.6 mm	R5D3148019G
6.4 x 18.0	24.50	8.0 - 12.7 mm	R5D3148019G

Data is strictly informative

Sizes in blue are limited availability. MOQ may be higher.

*4.8x21.5 - D2 = 10.7 and k = 1.4