



J.C. GUPTA & SONS

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com




sales@jcfasteners.com

THIN SHEET STANDOFF TSOS

For use in Steel Sheets Max HRB 60

Catalogue Datasheet B4C75

Stainless Steel A2 (SS304)

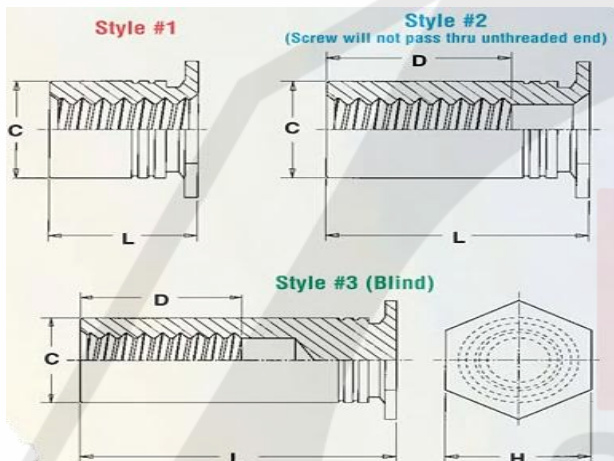

Size		M2.5x0.45	M3x0.5	M3.5x0.6
Min sheet thickness		0.63	0.63	0.63
C -0.14		4.20	4.20	5.39
H Nom.		4.80	4.80	6.40
D Min. thread depth		5.20	6.20	7.00
Min Hole Distance to edge		5.80	5.80	7.10
Hole Size in Sheet +0.08		4.22	4.22	5.41
Installation KN	5052-H34 AL	3.10	3.10	3.10
	Cold Rolled Sheet	4.90	4.90	8.00
Pushout N	5052-H34 AL	311	311	400
	Cold Rolled Sheet	445	445	667
Torque Out NM	5052-H34 AL	0.68	0.68	1.24
	Cold Rolled Sheet	1.00	1.00	1.70

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Type	Length L ↓ Dia →	M2.5x0.45	M3x0.5	M3.5x0.6
Type #1	2	B4C7520502	B4C7503002	
	3	B4C7520503	B4C7503003	B4C7530503
	4	B4C7520504	B4C7503004	B4C7530504
	5	B4C7520505	B4C7503005	B4C7530505
	6	B4C7520506	B4C7503006	B4C7530506
Type #2	8	B4C7520508	B4C7503008	B4C7530508
Type #3	10	B4C7520510	B4C7503010	B4C7530510
	12	B4C7520512	B4C7503012	B4C7530512
	14	B4C7520514	B4C7503014	B4C7530514
	16	B4C7520516	B4C7503016	B4C7530516
	18	B4C7520518	B4C7503018	B4C7530518
	19	B4C7520519	B4C7503019	B4C7530519

Type #1. Thru Threaded

Type #2. Screw might not pass through unthreaded end. Tapped to minimum full thread depth shown. Incomplete threads on tap may allow screw to pass through.

Type #3. Blind.

Sizes in BLUE are non-preferred. Availability is limited and MOQ higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F