




## BLIND RIVET NUT CLOSED Round Shank Knurled Large Flange [LF]



## Catalogue Datasheet **B6C50S** Stainless Steel A4/1.4401 (SS316)

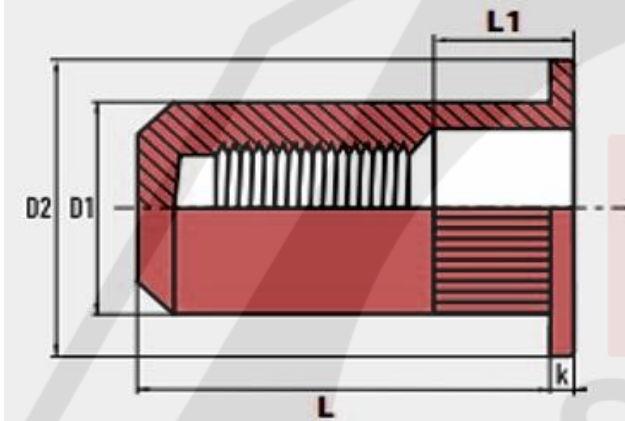


Dimensions in mm

Thread Size	Part No	Grip Range	Hole Size	D1 Body Dia	D2	L	k	Pull-In	Maximum Torque
Dia					Collar Dia	Body Length	Collar Thickness		
M3x0.5 1GR	B6C5003001S	0.5-2.5 mm	5.0 mm	4.9	7.0	15.5	0.9	4000 N	1.2 Nm
M3x0.5 2GR	B6C5003002S	2.5-4.0 mm				16.5			
M4x0.7 1GR	B6C5004001S	0.5-3.0 mm	6.0 mm	5.9	9.0	16.5	1.0	6800 N	3.0 Nm
M4x0.7 2GR	B6C5004002S	3.0-4.5 mm				18.0			
M5x0.8 1GR	B6C5005001S	0.5-3.0 mm	7.0 mm	6.9	10.0	19.0	1.0	10000 N	6.0 Nm
M5x0.8 2GR	B6C5005002S	3.0-5.5 mm				21.5			
M6x1.0 1GR	B6C5006001S	0.5-3.0 mm	9.0mm	8.9	13.0	22.0	1.5	15000 N	10.0 Nm
M6x1.0 2GR	B6C5006002S	3.0-5.5 mm				24.5			
M8x1.25 1GR	B6C5008001S	0.5-3.0 mm	11.0 mm	10.9	16.0	26.5	1.5	27000 N	24.0 Nm
M8x1.25 2GR	B6C5008002S	3.0-5.5 mm				29.0			
M10x1.5 1GR	B6C5010001S	0.5-3.0 mm	13.0 mm	12.9	19.0	28.5	2.0	37000 N	48.0 Nm
M10x1.5 2GR	B6C5010002S	3.0-6.0 mm				33.5			
M12x1.75 1GR	B6C5012001S	3.0-6.0 mm	16.0 mm	15.9	23.0	33.5	2.0	54000 N	82.0 Nm

Sizes in blue have limited availability. MOQ may be higher.

Data is purely informative

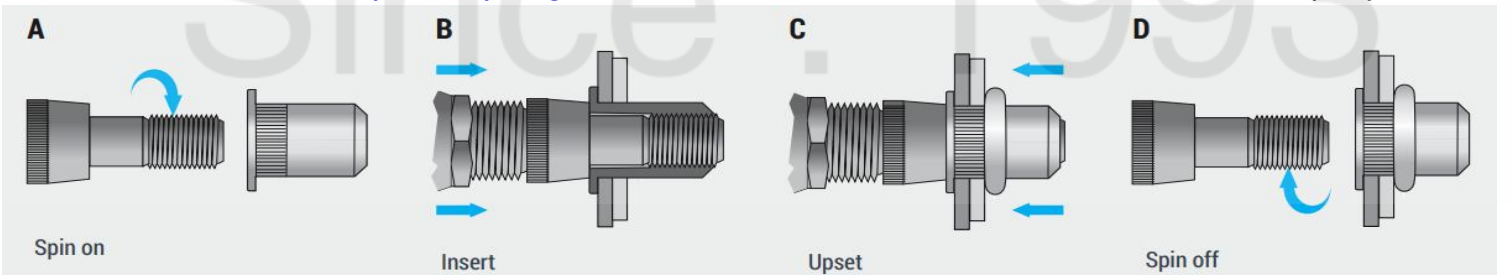

**Note:** All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F