


DIN 7349 THICK WASHER For Bolts with heavy spring pins



Catalogue Datasheet **B6D04** **Stainless Steel A4/1.4401 (SS316)**

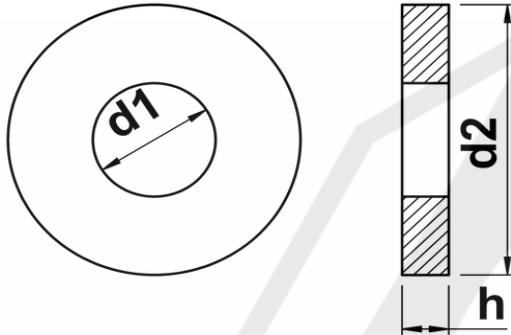

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Bolt Size (Nominal Size)	Item Code	For sleeve as per DIN 1481	Clearance Hole Diameter d1		Outside Diameter d2		Thickness h		
			min = nom size	max	max (nom)	min	Nom	max	min
M3 (A3.2)	B6D0403000	6	3.20	3.50	9.00	8.64	1.00	1.20	0.90
M4 (A4.3)	B6D0404000	8	4.30	4.60	12.00	11.57	1.60	1.90	1.40
M5 (A5.3)	B6D0405000	10	5.30	5.60	15.00	14.57	2.00	2.30	1.80
M6 (A6.4)	B6D0406000	12	6.40	6.80	17.00	16.57	3.00	3.40	2.70
M8 (A8.4)	B6D0408000	16	8.40	8.80	21.00	20.48	4.00	4.65	3.40
M10 (A10.5)	B6D0410000	18	10.50	10.90	25.00	24.48	4.00	4.65	3.40
M12 (A13)	B6D0412000	21	13.00	13.40	30.00	29.38	6.00	7.00	5.00
M14 (A15)	B6D0414000	25	15.00	15.50	36.00	35.38	6.00	7.00	5.00
M16 (A17)	B6D0416000	28	17.00	17.50	40.00	39.38	6.00	7.00	5.00
M18 (A19)	B6D0418000	32	19.00	19.50	44.00	43.38	8.00	9.00	7.00
M20 (A21)	B6D0420000	35	21.00	21.80	44.00	43.38	8.00	9.00	7.00
M22 (A23)	B6D0422000	38	23.00	23.80	50.00	48.10	8.00	9.00	7.00
M24 (A25)	B6D0424000	40	25.00	25.80	50.00	48.10	10.00	11.20	9.00
M27 (A28)	B6D0427000	45	25.00	25.80	60.00	58.10	10.00	11.20	9.00
M30 (A31)	B6D0430000	50	33.00	34.20	68.00	66.10	10.00	11.20	9.00

Sizes in BLUE are non-preferred. Availability is limited and MOQ higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F