



J.C. GUPTA & SONS

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com





sales@jcfasteners.com

DIN 7985 Pan Pozi (Z)



Catalogue Datasheet **B4B06**

Stainless Steel A2/1.4301 (SS304)

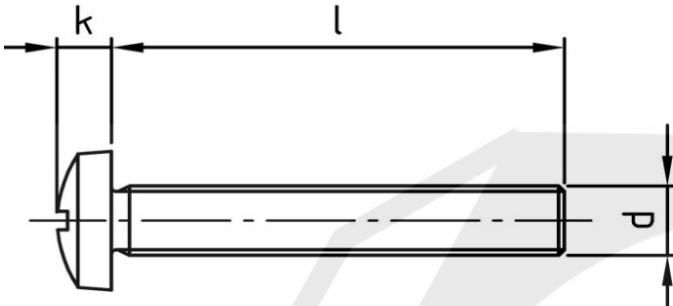

Thread runout as per ISO 3508

Parameter↓ Size→	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	*(M3.5x0.6)
Head Dia D	Max	3.20	4.00	5.00	6.00
	Min	2.90	3.70	4.70	5.50
Head Height k	Max	1.42	1.72	2.12	2.52
	Min	1.18	1.48	1.88	2.15
Drive Bit	PZ0	PZ1	PZ1	PZ1	PZ2
Length Tolerance	≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50				

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length↓ Size→	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	*(M3.5x0.6)
3	B4B0610603	B4B0602003	B4B0620503	B4B0603003	
4	B4B0610604	B4B0602004	B4B0620504	B4B0603004	B4B0630504
5	B4B0610605	B4B0602005	B4B0620505	B4B0603005	B4B0630505
6	B4B0610606	B4B0602006	B4B0620506	B4B0603006	B4B0630506
8	B4B0610608	B4B0602008	B4B0620508	B4B0603008	B4B0630508
10	B4B0610610	B4B0602010	B4B0620510	B4B0603010	B4B0630510
12	B4B0610612	B4B0602012	B4B0620512	B4B0603012	B4B0630512
14	B4B0610614	B4B0602014	B4B0620514	B4B0603014	B4B0630514
16	B4B0610616	B4B0602016	B4B0620516	B4B0603016	B4B0630516
18	B4B0610618	B4B0602018	B4B0620518	B4B0603018	B4B0630518
20	B4B0610620	B4B0602020	B4B0620520	B4B0603020	B4B0630520
22	B4B0610622	B4B0602022	B4B0620522	B4B0603022	B4B0630522
25	B4B0610625	B4B0602025	B4B0620525	B4B0603025	B4B0630525
28		B4B0602028	B4B0620528	B4B0603028	B4B0630528
30		B4B0602030	B4B0620530	B4B0603030	B4B0630530
35		B4B0602035	B4B0620535	B4B0603035	B4B0630535
40		B4B0602040	B4B0620540	B4B0603040	B4B0630540
45		B4B0602045	B4B0620545	B4B0603045	B4B0630545
50		B4B0602050	B4B0620550	B4B0603050	B4B0630550
55				B4B0603055	B4B0630555
60				B4B0603060	B4B0630560
65				B4B0603065	B4B0630565
70				B4B0603070	B4B0630570
75				B4B0603075	B4B0630575
80				B4B0603080	B4B0630580
90				B4B0603090	B4B0630590
100				B4B0603100	

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

(* Not part of the standard)

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1Z0
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrappe Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com



sales@jcfasteners.com

DIN 7985 Pan Pozi (Z)



Catalogue Datasheet B4B06

Stainless Steel A2/1.4301 (SS304)

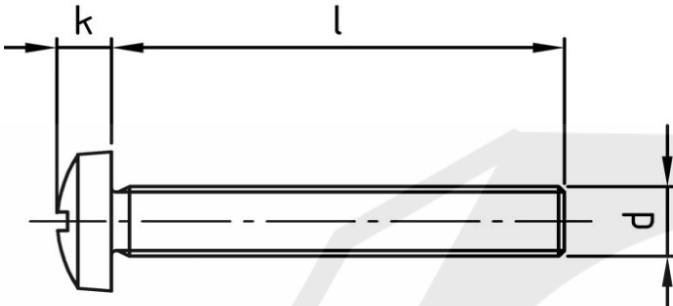

Thread runout as per ISO 3508

Parameter↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
Head Dia dk	Max	8.00	10.00	12.00	16.00
	Min	7.64	9.64	11.57	15.57
Head Height k	Max	3.25	3.95	4.75	6.15
	Min	2.95	3.65	4.45	5.85
Drive Bit	PZ2	PZ2	PZ3	PZ4	PZ4
Length Tolerance	≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50				

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Length↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
4	B4B0604004				
5	B4B0604005				
6	B4B0604006	B4B0605006			
8	B4B0604008	B4B0605008	B4B0606008		
10	B4B0604010	B4B0605010	B4B0606010	B4B0608010	
12	B4B0604012	B4B0605012	B4B0606012	B4B0608012	
14	B4B0604014	B4B0605014	B4B0606014	B4B0608014	
16	B4B0604016	B4B0605016	B4B0606016	B4B0608016	B4B0610016
18	B4B0604018	B4B0605018	B4B0606018	B4B0608018	B4B0610018
20	B4B0604020	B4B0605020	B4B0606020	B4B0608020	B4B0610020
22	B4B0604022	B4B0605022	B4B0606022	B4B0608022	B4B0610022
25	B4B0604025	B4B0605025	B4B0606025	B4B0608025	B4B0610025
28	B4B0604028	B4B0605028	B4B0606028	B4B0608028	B4B0610028
30	B4B0604030	B4B0605030	B4B0606030	B4B0608030	B4B0610030
35	B4B0604035	B4B0605035	B4B0606035	B4B0608035	B4B0610035
40	B4B0604040	B4B0605040	B4B0606040	B4B0608040	B4B0610040
45	B4B0604045	B4B0605045	B4B0606045	B4B0608045	B4B0610045
50	B4B0604050	B4B0605050	B4B0606050	B4B0608050	B4B0610050
55	B4B0604055	B4B0605055	B4B0606055	B4B0608055	B4B0610055
60	B4B0604060	B4B0605060	B4B0606060	B4B0608060	B4B0610060
65	B4B0604065	B4B0605065	B4B0606065	B4B0608065	B4B0610065
70	B4B0604070	B4B0605070	B4B0606070	B4B0608070	B4B0610070
75	B4B0604075	B4B0605075	B4B0606075	B4B0608075	B4B0610075
80	B4B0604080	B4B0605080	B4B0606080	B4B0608080	B4B0610080
90	B4B0604090	B4B0605090	B4B0606090	B4B0608090	B4B0610090
100	B4B0604100	B4B0605100	B4B0606100	B4B0608100	B4B0610100

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F