



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrappa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com





sales@jcfasteners.com

DIN 965 CSK PHILLIPS (H)



Catalogue Datasheet B6B05

Stainless Steel A4/1.4401 (SS316)

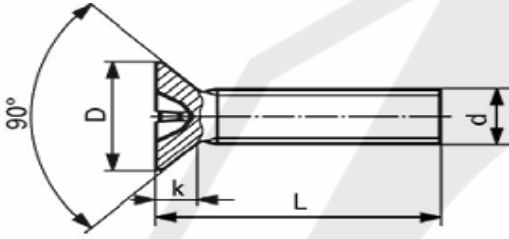

Dimensions in mm

Parameter ↓ Size →	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M3.5x0.6	
Head Dia D	Max	3.00	3.80	4.70	5.60	6.50
	Min	2.75	3.50	4.40	5.30	6.10
Head Height k	Max	1.05	1.25	1.55	1.75	2.05
Recess dia m nom		1.70	2.35	2.70	2.90	3.90
Slot depth max		0.91	1.25	1.55	1.80	1.90
Drive Bit		PH0	PH1	PH1	PH1	PH2
Length Tolerance		≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50				

Quote the item code given below with your order/ inquiries:

Thread runout as per ISO 3508

Length ↓ Size →	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M3.5x0.6
2	B6B0510602				
3	B6B0510603	B6B0502003	B6B0520503	B6B0503003	
4	B6B0510604	B6B0502004	B6B0520504	B6B0503004	B6B0530504
5	B6B0510605	B6B0502005	B6B0520505	B6B0503005	B6B0530505
6	B6B0510606	B6B0502006	B6B0520506	B6B0503006	B6B0530506
8	B6B0510608	B6B0502008	B6B0520508	B6B0503008	B6B0530508
10	B6B0510610	B6B0502010	B6B0520510	B6B0503010	B6B0530510
12	B6B0510612	B6B0502012	B6B0520512	B6B0503012	B6B0530512
14	B6B0510614	B6B0502014	B6B0520514	B6B0503014	B6B0530514
16	B6B0510616	B6B0502016	B6B0520516	B6B0503016	B6B0530516
18	B6B0510618	B6B0502018	B6B0520518	B6B0503018	B6B0530518
20	B6B0510620	B6B0502020	B6B0520520	B6B0503020	B6B0530520
22	B6B0510622	B6B0502022	B6B0520522	B6B0503022	B6B0530522
25	B6B0510625	B6B0502025	B6B0520525	B6B0503025	B6B0530525
28		B6B0502028	B6B0520528	B6B0503028	B6B0530528
30		B6B0502030	B6B0520530	B6B0503030	B6B0530530
35		B6B0502035	B6B0520535	B6B0503035	B6B0530535
40		B6B0502040	B6B0520540	B6B0503040	B6B0530540
45		B6B0502045	B6B0520545	B6B0503045	B6B0530545
50		B6B0502050	B6B0520550	B6B0503050	B6B0530550
55				B6B0503055	B6B0530555
60				B6B0503060	B6B0530560
65				B6B0503065	B6B0530565
70				B6B0503070	B6B0530570
75				B6B0503075	B6B0530575
80				B6B0503080	B6B0530580
90				B6B0503090	B6B0530590
100				B6B0503100	

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com





sales@jcfasteners.com

DIN 965 CSK PHILLIPS (H)



Catalogue Datasheet B6B05

Stainless Steel A4/1.4401 (SS316)

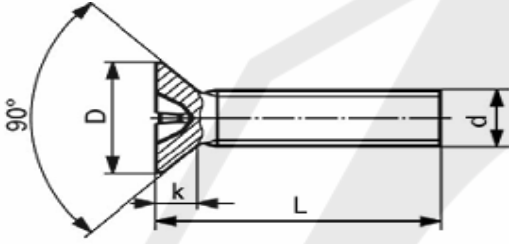

Dimensions in mm

Parameter↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5	
Head Dia D	Max	7.50	9.20	11.00	14.50	18.00
	Min	7.14	8.84	10.57	14.07	17.57
Head Height k	Max	2.30	2.65	3.15	4.20	5.20
Recess dia m nom		4.40	4.60	6.60	8.70	9.60
Slot depth max		2.40	2.60	3.30	4.40	5.30
Drive Bit	PH2	PH2	PH3	PH4	PH4	
Length Tolerance	≤3mm ±0.20, 4 - 6mm ±0.24, 7-10mm ±0.29, 11-16mm ±0.35, 20-30mm ±0.42, 35-50mm ±0.50					

Quote the item code given below with your order/ inquiries:

Thread runout as per ISO 3508

Length↓ Size→	M4x0.7	M5x0.8	M6x1.0	M8x1.25	M10x1.5
5	B6B0504005				
6	B6B0504006	B6B0505006			
8	B6B0504008	B6B0505008	B6B0506008		
10	B6B0504010	B6B0505010	B6B0506010	B6B0508010	
12	B6B0504012	B6B0505012	B6B0506012	B6B0508012	
14	B6B0504014	B6B0505014	B6B0506014	B6B0508014	
16	B6B0504016	B6B0505016	B6B0506016	B6B0508016	B6B0510016
18	B6B0504018	B6B0505018	B6B0506018	B6B0508018	B6B0510018
20	B6B0504020	B6B0505020	B6B0506020	B6B0508020	B6B0510020
22	B6B0504022	B6B0505022	B6B0506022	B6B0508022	B6B0510022
25	B6B0504025	B6B0505025	B6B0506025	B6B0508025	B6B0510025
28	B6B0504028	B6B0505028	B6B0506028	B6B0508028	B6B0510028
30	B6B0504030	B6B0505030	B6B0506030	B6B0508030	B6B0510030
35	B6B0504035	B6B0505035	B6B0506035	B6B0508035	B6B0510035
40	B6B0504040	B6B0505040	B6B0506040	B6B0508040	B6B0510040
45	B6B0504045	B6B0505045	B6B0506045	B6B0508045	B6B0510045
50	B6B0504050	B6B0505050	B6B0506050	B6B0508050	B6B0510050
55	B6B0504055	B6B0505055	B6B0506055	B6B0508055	B6B0510055
60	B6B0504060	B6B0505060	B6B0506060	B6B0508060	B6B0510060
65	B6B0504065	B6B0505065	B6B0506065	B6B0508065	B6B0510065
70	B6B0504070	B6B0505070	B6B0506070	B6B0508070	B6B0510070
75	B6B0504075	B6B0505075	B6B0506075	B6B0508075	B6B0510075
80	B6B0504080	B6B0505080	B6B0506080	B6B0508080	B6B0510080
90	B6B0504090	B6B0505090	B6B0506090	B6B0508090	B6B0510090
100	B6B0504100	B6B0505100	B6B0506100	B6B0508100	B6B0510100

Sizes in Blue have limited availability. MOQ will be higher

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F