Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrappa Road, Bengaluru - 560002

41478141, 9880539870 www.jcfasteners.com sales@jcfasteners.com

JCPlas™ CSK Pozi

RoHS

Catalogue Datasheet A2uB84

ST-ZINC

PlasFix 60°

Thread-Forming Screw for Plastics - Unified

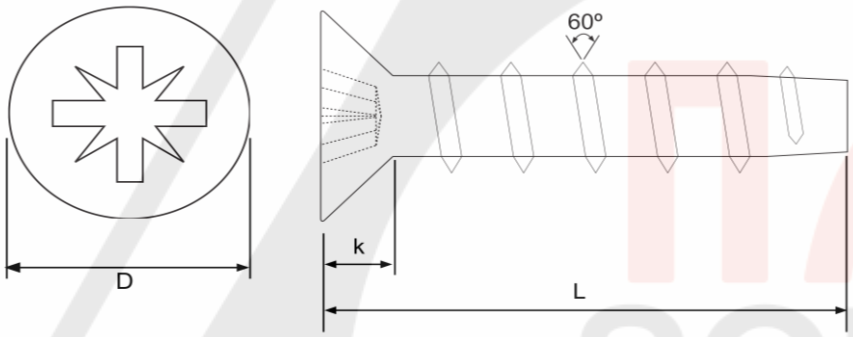

Dimension↓ Size→	2-28	4-20	6-19	8-16
Thread Diameter max	0.092	0.127	0.147	0.185
Thread Diameter min	0.085	0.117	0.137	0.173
Threads per inch (TPI)	28	20	19	16
Head Dia D max	0.172	0.225	0.279	0.332
Head height k	0.051	0.067	0.083	0.100
Drive Size H	PH1	PH1	PH2	PH2
Length Tolerance	≤3/4" ± 0.030, >3/4" ± 0.050			

Quote the item code given below with your order/ inquiries:

Dimensions in inches

Length ↓ Dia →	2-28	4-20	6-19	8-16
3/16	A2uB8422848			
1/4	A2uB8422862	A2uB8442062		
5/16	A2uB8422879	A2uB8442079	A2uB8461979	A2uB8481679
3/8	A2uB8422891	A2uB8442091	A2uB8461991	A2uB8481691
1/2	A2uB8422813	A2uB8442013	A2uB8461913	A2uB8481613
5/8		A2uB8442015	A2uB8461915	
3/4		A2uB8442019	A2uB8461919	A2uB8481619

Sizes in BLUE are non-prefered. Availability is limited and MOQ is higher.

Data is strictly informative