



J.C. GUPTA & SONS

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002



41478141, 9880539870



www.jcfasteners.com




sales@jcfasteners.com

THIN SHEET STANDOFF TSO

Catalogue Datasheet **A2C75**

For use in Steel Sheets Max HRB 60

MS-ZINC

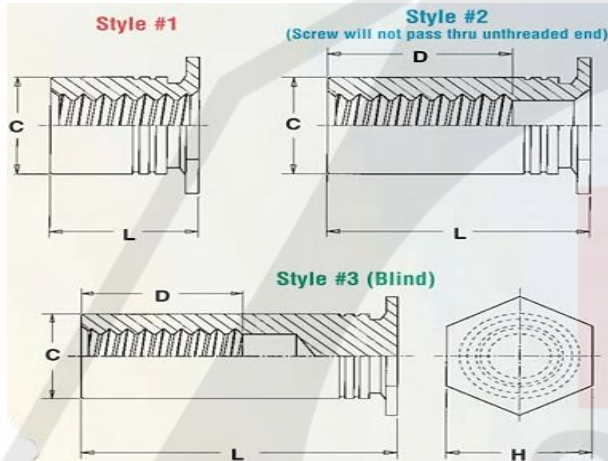

Size		M2.5x0.45	M3x0.5	M3.5x0.6
Min sheet thickness		0.63	0.63	0.63
C -0.14		4.20	4.20	5.39
H Nom.		4.80	4.80	6.40
D Min. thread depth		5.20	6.20	7.00
Min Hole Distance to edge		5.80	5.80	7.10
Hole Size in Sheet +0.08		4.22	4.22	5.41
Installation KN	5052-H34 AL	3.10	3.10	3.10
	Cold Rolled Sheet	4.90	4.90	8.00
Pushout N	5052-H34 AL	311	311	400
	Cold Rolled Sheet	445	445	667
Torque Out NM	5052-H34 AL	0.68	0.68	1.24
	Cold Rolled Sheet	1.00	1.00	1.70

Quote the item code given below with your order/ inquiries:

Dimensions in mm

Type	Length L↓Dia→	M2.5x0.45	M3x0.5	M3.5x0.6
Type #1	2	A2C7520502	A2C7503002	
	3	A2C7520503	A2C7503003	A2C7530503
	4	A2C7520504	A2C7503004	A2C7530504
	5	A2C7520505	A2C7503005	A2C7530505
	6	A2C7520506	A2C7503006	A2C7530506
Type #2	8	A2C7520508	A2C7503008	A2C7530508
Type #3	10	A2C7520510	A2C7503010	A2C7530510
	12	A2C7520512	A2C7503012	A2C7530512
	14	A2C7520514	A2C7503014	A2C7530514
	16	A2C7520516	A2C7503016	A2C7530516
	18	A2C7520518	A2C7503018	A2C7530518
	19	A2C7520519	A2C7503019	A2C7530519

Type #1. Thru Threaded

Type #2. Screw might not pass through unthreaded end. Tapped to minimum full thread depth shown. Incomplete threads on tap may allow screw to pass through.

Type #3. Blind.

Sizes in BLUE are non-preferred. Availability is limited and MOQ higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some magnetic properties due to the manufacturing process.

Refer: ISO 3506-2 Annex F